



Remote Indicator

C-9314P

Description

The C-9314P Remote Indicator is used to display an alarm from a detector. Suitable applications include when a detector is installed inside a room, false ceiling or an under floor cable space. When the detector issues an alarm, the LED on the lamp will light indicating where the detector was triggered.

Features and Benefits


- Highlight LED
- Wall mounting. Easy installation and connection.

Technical Specifications

- Operating voltage: 2.5 to 3Vdc
- Operating Current: 30mA
- Operating temperature: -10°C to +50°C
- Relative humidity: 95%
- Indicator: LED, red
- Application: Indoor use
- Material and colour: ABS, white, red
- Wiring: 1 pair polarized
- Dimensions: 650mm x 650mm x 350mm

Wiring and Connection

Connect the wires to the required terminal according to the wiring diagram. From Terminals 2 and 4 of detector base. Connect terminal 2 to (+) positive unit as well as terminal 4 to (-) negative terminal. The cable must be fire rated type and the distance between the detector and remote indicator must not exceed 50 meters.

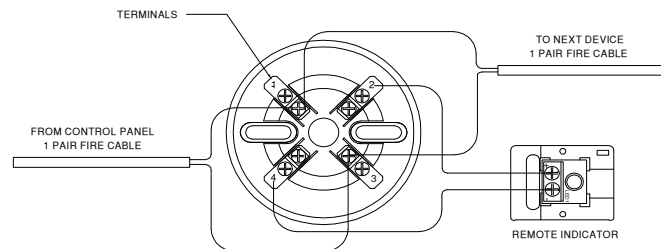

Selection of Compatible Detectors

- ✓ D/I-9102 Optical Detector with Remote Indicator Output
- ✓ D/I-9103 Dual Heat Detector with Remote Indicator Output
- ✓ D/C-9102 Conventional Optical Smoke Detector with Remote Indicator Output
- ✓ DC-9103 Conventional Dual Heat Detector with Remote Indicator Output

Ordering Information



Part Number: C-9314P
Description: Remote Indicator
Weight / Kg.: 0.03
Pack Qty. per Box: 100